#### 2014 BOAT & KAYAK COLLECTION

#### NFLATE YOUR FUN™

#### Shanghai

Bestway Inflatables & Material Corp. No.3065 Cao An Road, Shanghai, 201812, China Tel: 86 21 6913 5588 Fax: 86 21 5913 8383 E-mail: info@bestway-shanghai.com

#### Central & South America

Bestway Central & South America Ltda Salar Acostan 1282, Parque Enea, Pudahuel, Santiago, Chile Tel: 56 2 2365 0315 Fax: 56 2 2365 0323 E-mail: info@bestway-southamerica.com

#### Hong Kong

Bestway (Hong Kong) International Ltd. Suite 102, 1st Floor, Tsim Sha Tsui Centre, 66 Mody Road, Kowloon, Hong Kong Tel: 852 2997 7169 Fax: 852 2997 7869 E-mail: info@bestway-hongkong.com

#### U.S.A.

Bestway (USA) Inc. 1320 S. Priest Drive, Suite 103 Tempe, Arizona 85281, United States Tel: 1 480 838 3888 Fax: 1 480 838 1888 E-mail: info@bestway-northamerica.com

#### Europe

Bestway (Europe) s.r.l. Via Resistenza 5, 20098 San Giuliano M.se (Mi) - Italy Tel: 39 02 9884 881 Fax: 39 02 9884 8828 E-mail: info@bestway-europe.com





www.bestway-global.com

 $\ensuremath{\texttt{@}}\xspace2013$  Bestway Inflatables & Material Corp. All Rights Reserved.









### 65052 HYDRO-FORCE VENTURA KAYAK

- Premium coated nylon hull that is resistant to sun, oil and sea water
- Integrated drain valve
- Moulded directional strakes
- Passengers: 2 adults
- Heavy-duty repair patch
- Full color box
- 1 Ea., 17.4 kg (38.3 Lb.)













	TEM VO.	DEFLATED	INFLATED	MATERIAL Ga.(mm)	CAPACITY 🛉 + 🛉 (PERSON)	MAX.LOAD WEIGHT (lbs/kgs) TT + 👖 🛊	PUMP	OARS UNIT	CASE PACK (cbm/pkg)	SEAT
#	#65019	2.86m x 1.08m 113" x 43"	2.80m x 75cm 110" x 30"	22/16 0.55/0.40	1	220/100	40cm 16"	2.18m (86") one	0.04/1PCS	1
#	#65020	3.68m x 1.08m 145" x 43"	3.57m x 75cm 141" x 30"	22/16 0.55/0.40	1+1	350/160	40cm 16"	2.18m (86") two	0.05/1PCS	2



- Quick inflation/deflation screw valves
- Form-fitted construction prevents water from entering the cockpit
- Includes a 2.18m (86") aluminum, two bladed oar
- Passenger: 1 adult
- Heavy-duty repair patchFull color box
- 1 Ea., 9.3 kg (20.5 Lb.)




- Quick inflation/deflation screw valves
- Form-fitted construction prevents water from entering the cockpit
- Includes two 2.18m (86") aluminum, two-bladed oars
   Passengers: 1 adult + 1 child
   Heavy-duty repair patch



THE VIEW IN THE





Full color box

• 1 Ea., 12.8 kg (28.3 Lb.)





Extra strength side walls are made with 3 separate layers of material. The inner layer of polyester mesh is laminated to the 2 outer heavy gauge PVC layers. This creates a total thickness of 0.40-0.80 mm (16-32 gauge) depending on the size of the boat.







2.91m x 1.27m x 46cm (115" x 50" x 18")

ITEM NO.	DEFLATED	INFLATED		MATERIAL Ga.(mm)	CAPACITY THE + T
#65044	2.97m x 1.47m 117" x 58"	2.91m x 1.2 115" x 50"	27m x 46cm x 18"	26 0.65	2+1
MAX.LOAD WEIGHT (lbs/	/kgs)	PUMP	OARS UNIT	CASE PACK (cbm/pkg)	SEAT
594/270		40cm 16"	1.52m (60") one pair	0.09/1PCS	2

#### #65044

- Extra strength, 3-ply reinforced vinyl
- Quick inflation/deflation screw valves
- Includes motor mount grommets for use with Bestway motor mount (#62069) and motors (#65043, #65045) Detailed on page 19
- Max. Power: 1.0 kw (1.4 hp)
- Passengers: 2 adults + 1 child
- Heavy-duty repair patch
- Full color box
- 1 Ea., 14.9 kg (32.9 Lb.)












High-pressure inflatable

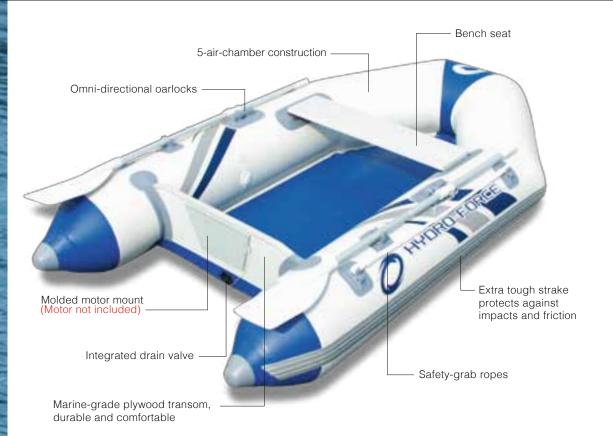

Extra strength side walls are made with 3 separate layers of material. The inner layer of polyester mesh is laminated to the 2 outer heavy gauge PVC layers. This creates a total thickness of 0.40-0.80 mm (16-32 gauge) depending on the size of the boat.







2.30m x 1.30m x 33cm (91" x 51" x 13")

ITEM NO.	SZE		MATERIAL Ga.(mm)	CAPACITY III	
#65053	2.30m x 1.30m x 3 91" x 51" x 13"	3cm	28 0.7	2	
MAX.LOAD WEIGHT (lbs	s/kgs) 🎛 + 🖷	PUMP	OARS/UNIT	CASE PACK (cbm/pkg)	SEAT
568.8/258		40cm 16"	1.52m (60") one pair	0.13/1PCS	1

#### #65053

- Pre-tested materials and quality-tested construction
- Superior-strength, high-density, sunlight resistance, terylene supported PVC
- Quick inflation/deflation air valves
- Max. Power: 2.25 kw (3 hp)
- Passengers: 2 adults
- Package also includes:
- 10m (33') towrope
- Repair kit
- Pressure gauge
- Full color box
- 1 Ea., 20.2 kg (44.5 Lb.)








PRODUCT HIGHLIGHTS








## CASPIAN - #65046 | HYDRO-FORCETM - BOATS | 09



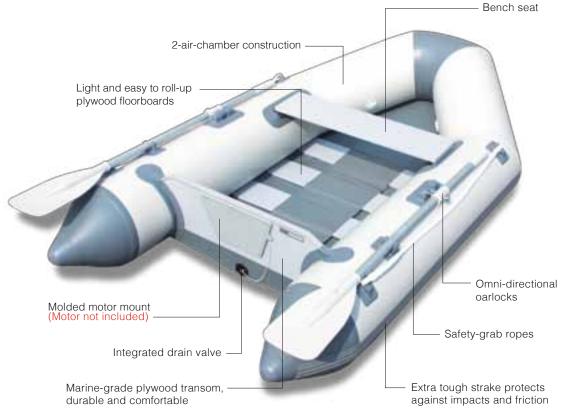

Extra strength side walls are made with 3 separate layers of material. The inner layer of polyester mesh is laminated to the 2 outer heavy gauge PVC layers. This creates a total thickness of 0.40-0.80 mm (16-32 gauge) depending on the size of the boat.







2.30m x 1.30m x 33cm (91" x 51" x 13")

ITEM NO.	SZE		MATERIAL Ga.(mm)	CAPACITY ##	
#65046	2.30m x 1.30m x 91" x 51" x 13"	33cm	28 0.7	2	
MAX,LOAD WEIGHT (lbs	s/kgs) 📆 + 🖷	PUMP	OARS UNIT	CASE PACK (cbm/pkg)	SEAT
568.8/258		40cm 16"	1.45m (57")	0.17/1PCS	1

#### #65046


- Pre-tested materials and quality-tested construction
- Superior-strength, high-density, sunlight resistant, terylene supported PVC
- Quick inflation/deflation air valves
- Max. Power: 2.25 kw (3 hp)
- Passengers: 2 adults
- Package also includes:
- 10m (33') towrope
- Repair kit
- Pressure gauge
- Shelf box with picture
- 1 Ea., 25.0 kg (55.1 Lb.)







0

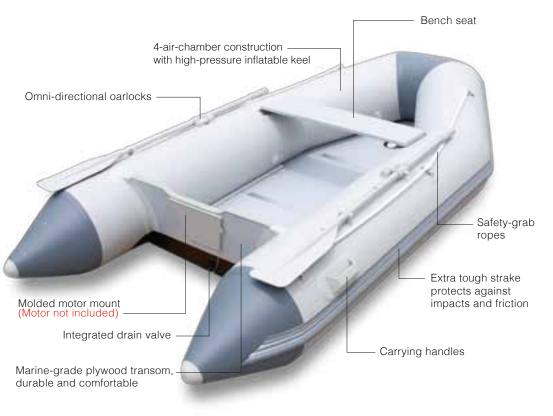

Extra strength side walls are made with 3 separate layers of material. The inner layer of polyester mesh is laminated to the 2 outer heavy gauge PVC layers. This creates a total thickness of 0.40-0.80 mm (16-32 gauge) depending on the size of the boat.







2.80m x 1.52m x 42cm (110" x 60" x 16.5")

ITEM NO.	SZE		MATERIAL Ga.(mm)	CAPACITY ### +	<b>†</b>
#65047	2.80m x 1.52m x 42c 110" x 60" x 16.5"	m	34 0.85	3+1	
MAX.LOAD WEIGHT (lbs/k	gs)	PUMP	OARS UNIT	CASE PACK (cbm/pkg)	SEAT
1058.2/480		40cm 16"	1.62m (64") one pair	0.26/1PCS	1

#### #65047


- Pre-tested materials and quality-tested construction
- Superior-strength, high-density, sunlight resistant, terylene supported PVC
- Quick inflation/deflation air valves
- Max. Power: 7.5 kw (10 hp)
- Passengers: 3 adults + 1 child
- Package also includes:
- 10m (33') towrope
- Repair kit
- Pressure gauge
- Shelf box with picture
- 1 Ea., 47.4 kg (104.5 Lb.)








PRODUCT HIGHLIGHTS





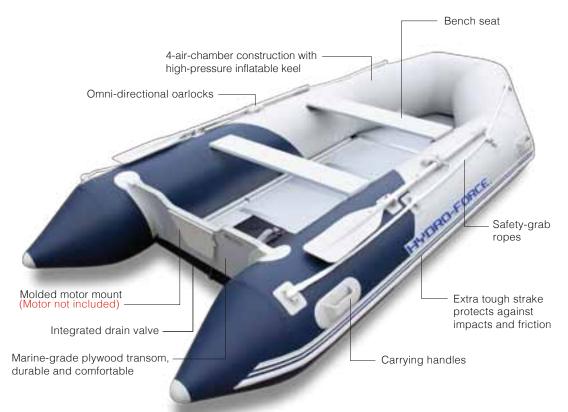

Extra strength side walls are made with 3 separate layers of material. The inner layer of polyester mesh is laminated to the 2 outer heavy gauge PVC layers. This creates a total thickness of 0.40-0.80 mm (16-32 gauge) depending on the size of the boat.







3.30m x 1.62m x 44cm (130" x 64" x 17")

ITEM NO.	SZE		MATERIAL Ga.(mm)	CAPACITY #### (PERSON)	+ 🋉
#65048	3.30m x 1.62m x 44c 130" x 64" x 17"	:m	36 0.9	4+1	
MAX.LOAD WEGHT (lbs/	/kgs)	PUMP	OARS UNIT	CASE PACK (cbm/pkg)	SEAT
1411/640		40cm 16"	1.62m (64") one pair	0.31/1PCS	2

#### #65048

- Pre-tested materials and quality-tested construction
- Superior-strength, high-density, sunlight resistant, terylene supported PVC
- Quick inflation/deflation air valves
- Max. Power: 11.2 kw (15 hp)
- Passengers: 4 adults + 1 child
- Package also includes:
- 10m (33') towrope
- Fixed buckle for oil box
- Repair kit
- Pressure gauge
- Shelf box with picture
- 1 Ea., 65.5 kg (144.4 Lb.)








PRODUCT

HIGHLIGHTS







# Bench seat 4-air-chamber construction with high-pressure inflatable keel Omni-directional oarlocks -Molded motor mount -

(Motor not included)

durable and comfortable

Integrated drain valve

Marine-grade plywood transom,

Extra strength side walls are made with 3 separate layers of material. The inner layer of polyester mesh is laminated to the 2 outer heavy gauge PVC layers. This creates a total thickness of 0.40-0.80 mm (16-32 gauge) depending on the size of the boat.




Extra tough strake

impacts and friction

protects against

Carrying handles

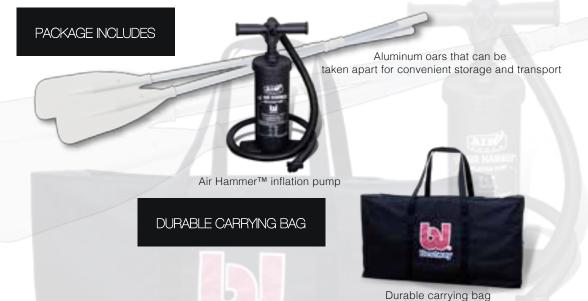




3.30m x 1.62m x 44cm (130" x 64" x 17")

ITEM NO.	SZE		MATERIAL Ga.(mm)	CAPACITY ##### (PERSON)	+ 🋉
#65049	3.30m x 1.62m x 44c 130" x 64" x 17"	em	36 0.9	4+1	
MAX.LOAD WEIGHT (lbs/	/kgs)	PUMP	OARS UNIT	CASE PACK (cbm/pkg)	SEAT
1411/640		40cm 16"	1.62m (64") one pair	0.31/1PCS	2

#### #65049

- Pre-tested materials and quality-tested construction
- Superior-strength, high-density, sunlight resistant, terylene supported PVC
- Metal steel tow ring
- Quick inflation/deflation air valves
- Max. Power: 11.2 kw (15 hp)
- Passengers: 4 adults + 1 child
- Package also includes:
- 10m (33') towrope
- Fixed buckle for oil box
- Repair kit
- Pressure gauge
- Shelf box with picture

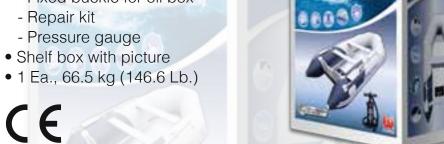


















Extra strength side walls are made with 3 separate layers of material. The inner layer of polyester mesh is laminated to the 2 outer heavy gauge PVC layers. This creates a total thickness of 0.40-0.80 mm (16-32 gauge) depending on the size of the boat.



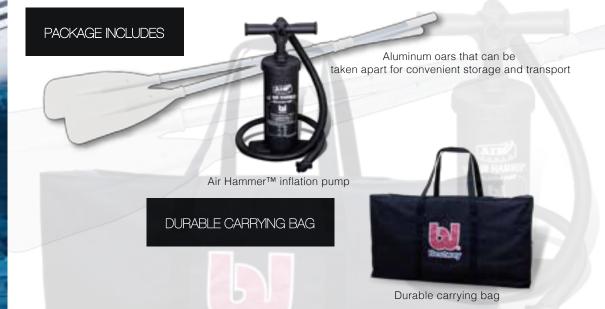



3.80m x 1.80m x 46cm (150" x 71" x 18")

MEM NO.	SZE		MATERIAL Ga.(mm)	CAPACITY NO	
#65050	3.80m x 1.80m x 46c 150" x 71" x 18"	m	36 0.9	6	
MAX.LOAD WEIGHT (lbs/k	gs) <b>T</b> + <b>ŤŤŤŤŤ</b>	PUMP	OARS UNIT	CASE PACK (cbm/pkg)	SEAT
1719.6/780		40cm 16"	1.62m (64") one pair	0.43/1PCS	2

#### #65050


- Pre-tested materials and quality-tested construction
- Superior-strength, high-density, sunlight resistant, terylene supported PVC
- Quick inflation/deflation air valves
- Max. Power: 22.5 kw (30 hp)
- Passengers: 6 adults
- Package also includes:
- 10m (33') towrope
- Fixed buckle for oil box
- Repair kit
- Pressure gauge
- Shelf box with picture
- 1 Ea., 86.0 kg (189.6 Lb.)







PRODUCT HIGHLIGHTS



BOAT ACCESSORIES | HYDRO-FORCETM - BOAT | 19



#### 62069 HYDRO-FORCETM MOTOR MOUNT

- Hydro-Force<sup>™</sup> Motor Mount
- Attaches to most inflatable boats
- Supports a motor
- Assemble easily
- Adjustable stainless steel tube
- Fits up to 3.0 HP gas outboard motor
  Suitable for electrical outboard motor
- Shelf box with picture
- 4 Ea., 11.3 kg (24.9 Lb.)



#### 62085 MULTI-FUNCTIONAL HAND PUMP

- 46cm (18")
- Inflates/deflates on up and down stroke
- Air volume: 2 x 2,000 cc
- Easily switches from inflation to deflation
- Flexible hose
- 4 valve adaptors to fit nearly every inflation valve
- High pressure pump
- Includes a needle for **sports ball** including: basketball, soccer, football, volleyball
- Heavy-duty construction
- Full color box
- 4 Ea., 4.6 kg (10.1 Lb.)



#### BOAT MOTORS

ITEM	65043	65045	
Name	Hydro-Ford	ce™ Motor	
Thrust (N)	142.4	245	
Thrust (lbs.)	32	55	
Voltage (V)	12	12	
Power (W)	312	624	
Power (HP)	0.42	0.85	
Handle Length (mm)	195/310	195/310	
Handle Length (in)	7.68/12.2	7.68/12.2	
Shaft Length (mm)	711.2	914	
Shaft Length (in)	28	36	
Propeller Blade	2	2	
Motor Type	Brush Motor	Brush Motor	
Speed	5 forward, 3 reverse	5 forward, 3 reverse	
Net weight (kg)	7.1	9.5	
Net weight (lbs.)	15.65	20.9	
Gross Weight (kg)	9	11.6	
Gross Weight (lbs.)	19.84	25.57	
Battery Meter	Voltage Meter can w when the voltage is Battery not included	low.	





Work with 12V,45Ah Pd-acid Battery





- 3.10m x 68cm x 10cm (122" x 27" x 4")
- The Hydro-Force™ WaveEdge can be used as a SUP or a kayak
- Two modeled side fins and one removable middle fin for directional stability
- Drop stitch material provides unparalleled strength and durability
- Quick inflation/deflation air valve
- Non-slip traction pad
- Steel tow ring
- Convenient deck handle to easily pick up and carry the SUP
- Weight capacity: 100 kg (220 Lb.)
- Passengers: 1 adult
- Package includes:
- Air Hammer™ inflation pump
- Aluminum oars that can be used for kayaking or surfing. (2.10m/83")
- Repair kit
- Travel bag
- Pressure gauge
- Kayak seat with back rest
- Full color box
- 1 Ea., 13.5 kg (29.8 Lb.)





#### 65055 Hydro-Force™ WaveEdge SUP

- 3.10m x 68cm x 10cm (122" x 27" x 4")
- Two modeled side fins and one removable middle fin for directional stability
- Drop stitch material provides unparalleled strength and durability
- Quick inflation/deflation air valve
- Non-slip traction pad
- Steel tow ring
- Convenient deck handle to easily pick up and carry the SUP
- Weight capacity: 100 kg (220 Lb.)
- Passengers: 1 adult
- Package includes:
- Air Hammer™ inflation pump
- Aluminum oars that can be used for surfing. (2.10m/83")
- Repair kit
- Travel bag
- Pressure gauge
- Full color box
- 1 Ea., 12.0 kg (26.4 Lb.)



